

528,873

Rec'd PCT/PTO 23 MAR 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau

10/528873

(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
WO 2004/028603 A1

(51) International Patent Classification?: A61M 5/50

(21) International Application Number:  
PCT/US2003/023839

(22) International Filing Date: 30 July 2003 (30.07.2003)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:  
10/254,924 25 September 2002 (25.09.2002) US  
60/421,024 24 October 2002 (24.10.2002) US(71) Applicant (for all designated States except US): BEC-  
TON DICKINSON AND COMPANY [US/US]; 1 Bec-  
ton Drive, Franklin Lakes, NJ 07417-1880 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PELKEY, Brian, J.  
[US/US]; 10 Chestnut Terrace, Rockaway, NJ 07866 (US).FLEISCHER, Gene [US/US]; 51 Cranford Drive, New  
City, NY 10956 (US). SAMUEL, P.R., Suresh [IN/IN];  
Q13, Kovaipudur, Coimbatore 641 042 (IN).(74) Agent: LUKASAVAGE, Jeanne, P.; Becton Dickinson  
and Company, 1 Becton Drive, Franklin Lakes, NJ 07417-  
1880 (US).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SINGLE USE SYRINGE FOR TWO STROKE PROCEDURES

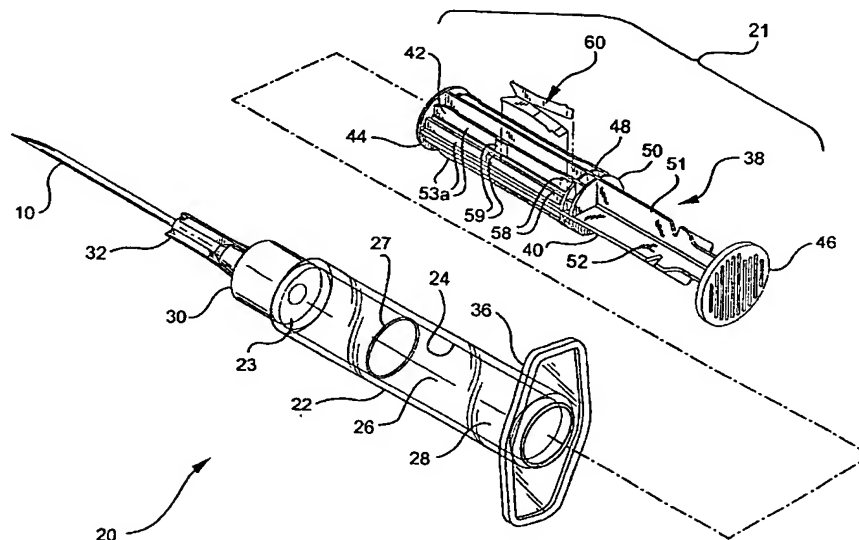

(57) Abstract: A single use syringe is provided. The syringe includes features that cause the plunger rod to be locked with respect to the syringe barrel upon completion of a two stroke injection procedure, such as a drug reconstitution and injection sequence. The locking device may include barbs for engaging the syringe barrel and relatively long, proximally extending legs. The legs include barbs for engaging the syringe barrel and end portions for engaging the plunger rod. The plunger rod includes a recess defined by converging surfaces, the recess being displaced from the longitudinal axis thereof. The surfaces of the plunger rod define teeth that are engageable with the locking element.

WO 2004/028603 A1